


HSF

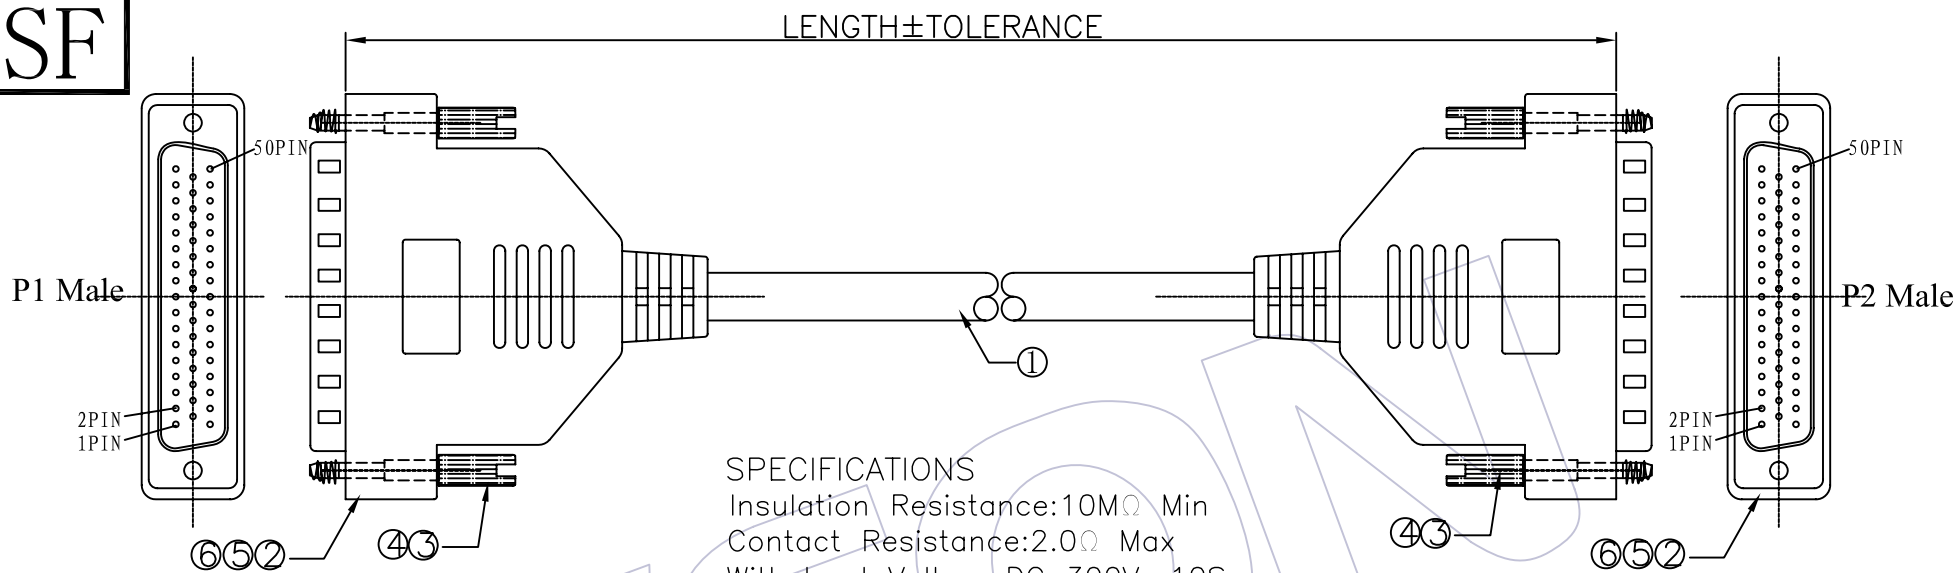

SPECIFICATIONS
Insulation Resistance:10MΩ Min
Contact Resistance:2.0Ω Max
Withstand Voltage:DC 300V, 10S
The Cable Assembly Must 100% Test

Ordering Information

C9700 - 50 02 XXXX -001
No.of Pins: 50P Shape Style: 02=Both ends Process Length of Line

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~30AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

CONNECT METHOD					
P1	P2	P1	P2	P1	P2
1	1	18	18	35	35
2	2	19	19	36	36
3	3	20	20	37	37
4	4	21	21	38	38
5	5	22	22	39	39
6	6	23	23	40	40
7	7	24	24	41	41
8	8	25	25	42	42
9	9	26	26	43	43
10	10	27	27	44	44
11	11	28	28	45	45
12	12	29	29	46	46
13	13	30	30	47	47
14	14	31	31	48	48
15	15	32	32	49	49
16	16	33	33	50	50
17	17	34	34	SHELL	SHELL

⑥	GPVC-B70XG01	Plastic	PVC 45P Black/Blue/Grey	0.026	KG
⑤	GPE-W00XG01	Plastic	PE WHITE	0.008	KG
④	GPVC-B60XG01	Plastic	PVC 35P Black/Blue/Grey	0.006	KG
③		Screw	4#-4UNC	4	PCS
②	6220-50MXXX01	D-SUB	HDB50P MALE SOLDER TYPE Black/Blue	2	PCS
①	WXXX-XXXX00001	Cable	UL2464/2919 22~30AWG*50C+D+AL/MYLAR PVC Jacket Black/Beige/Grey	XXX	MM
NO.	Part No.	Name	specification	Q'TY	UNIT

						工程图 ENGINEERING		绘图 DRAW		BEN		09/11/02		SCALE	Free	WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD	
						X.X	±0.30	设计 DESIGN						UNIT	mm		
						X.XX	±0.20	审核 CHECK						SIZE	A4	料号 PART NO.	
						X.XXX	±0.10	核准 APPROVE						SHEET	1/1	品名 TITLE:	
AO		09/11/02		NEW										PROJ.	客户料号Customer NO.	C9700-5002XXXX-001	
版次 REV	日期 DATE	变更说明 MODIFICATION DESCRIPTION		变更 CHANGE	核准 APPROVE	Angle DIM	± 2' TOL									HDB 50P Male TO HDB50P Male	